

SOUNDTRAXX

Tsunami² TSU-KN1 Wiring Diagram

The TSU-KN1 is a plug and play Tsunami2 N-Scale decoder. The new TSU-KN1 is designed to fit into Kato N-Scale E, F-units, F40PH, PA and P42 locomotives. Get an easy install and the amazingly realistic sounds plus the features that all Tsunami2 decoders have to offer.

Specifications

Dimensions: 55 x 13.8 x 3.2mm

Max. Motor Stall Current: 500mA


Max. Function Current: 100mA (each output)

Function Outputs: 4 - LED Friendly. No resistors necessary!

Audio Amplifier: 1W, 8-Ohm Load

DCC Track Voltage: 7.5V - 22V

Sound Channels: 16

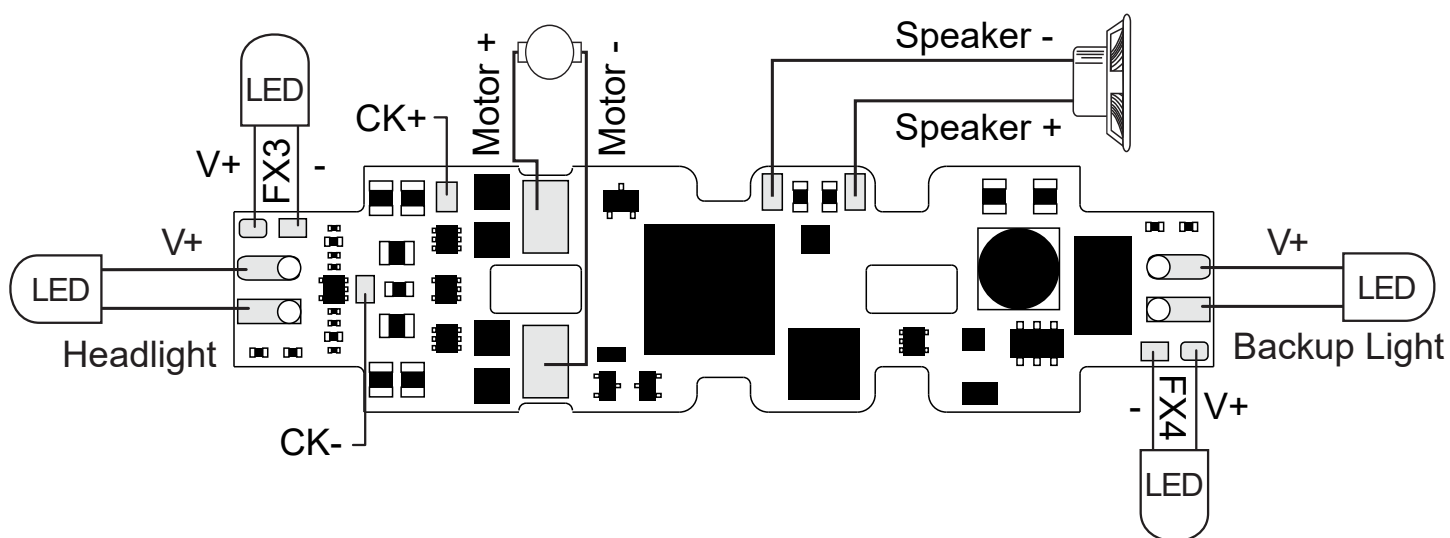

Note: For complete installation instructions, refer to the *TSU-KN1 Application Note* on the "Documentation" page in the "Reference" section of our website (www.soundtraxx.com).